

FIREFLY SUSPENDED

Designed by



Enrique Ferrer Plaza

Descripción

Outdoor lighting designed to recreate natural lighting environments.



Sketch

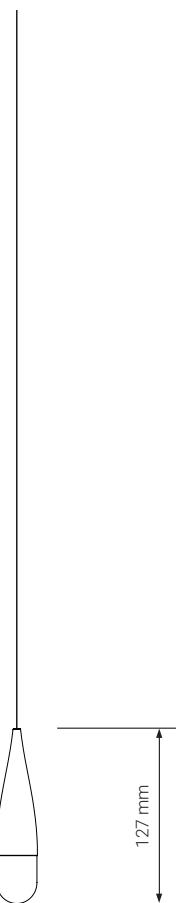

General information

Construction aspects

Material:

- Aluminium
- Stainless steel

Color:

- Black
- Corten brown

*For more colors consult

Weight:

- 0,1 kg

General dimensions:

- 100 x 30 mm

Luminous information

Color Temp.: 2700 K

*For more colors consult

Luminous flux: 2,8 W - 280 lm

CRI>90

IP 66

Optics

Diffuse

Drivers

On/Off


1 - 10v

Dali/Push

Settings

Surface-mount canopy - 1 unit


Ø62mm



1 x LED 2.8 W.
LED 2700 K. CRI 90. 280 lm.
Driver: CV 24 V. 100-240 V. 50/60 Hz.
***Regulation on request:** Push, DALI, 1-10 V.
Installation position: Surface-mount.
Weight: 0,3 kg.

Flush-mount canopy - 1 unit


Ø62mm



1 x LED 2.8 W.
LED 2700 K. CRI 90. 280 lm.
Driver: CV 24V. 100-240 V. 50/60 Hz.
***Regulation on request:** Push, DALI, 1-10 V.
Installation position: Flush-mount.
Weight: 0,27 kg.

Surface-mount canopy - 3 units


Ø150mm

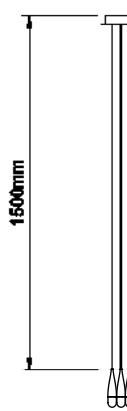

3 x LED 2.8 W.
LED 2700 K. CRI 90. 840 lm.
Regulable Driver: CV 24 V. 100-240 V. 50/60 Hz.
***Regulation on request:** Push, DALI, 1-10 V.
Installation position: Surface-mount.
Weight: 0,9 kg.

Surface-mount canopy - 5 units


Ø300mm



5 x LED 2.8 W.
LED 2700 K. CRI 90. 1400 lm.
Regulable Driver: CV 24 V. 100-240 V. 50/60 Hz.
***Regulation on request:** Push, DALI, 1-10 V.
Installation position: Surface-mount.
Weight: 1,4 kg.

Surface-mount canopy - 9 units


Ø600mm



9 x LED 2.8 W.
LED 2700 K. CRI 90. 2520 lm.
Regulable Driver: CV 24 V. 100-240 V. 50/60 Hz.
***Regulation on request:** Push, DALI, 1-10 V.
Installation position: Surface-mount.
Weight: 2,4 kg.

Surface-mount canopy - 22 unit



Ø1000mm



22 x LED 2.8 W.
LED 2700 K. CRI 90. 6160 lm.
Regulable Driver: CV 24 V. 100-240 V. 50/60 Hz.
***Regulation on request:** Push, DALI, 1-10 V.
Installation position: Surface-mount.
Weight: 5,9 kg.

Settings

Square surface-mount canopy - 4 units



4 x LED 2.8 W.



LED 2700 K. CRI 90. 1120 lm.

Regulable Driver: CV 24 V. 100-240 V. 50/60 Hz.

*Regulation on request: Push, DALI, 1-10 V.

Installation position: Surface-mount.**Weight:** 1,2 kg.

Square surface-mount canopy - 9 units



9 x LED 2.8 W.

LED 2700 K. CRI 90. 2520 lm.

Regulable Driver: CV 24 V. 100-240 V. 50/60 Hz.

*Regulation on request: Push, DALI, 1-10 V.

Installation position: Surface-mount.**Weight:** 2,5 kg.