

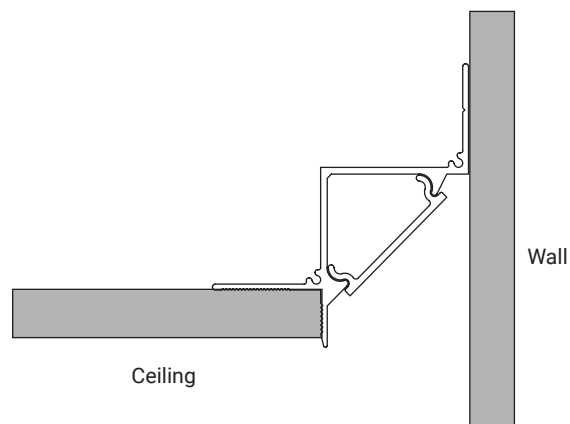


Designed by
Enrique Ferrer Plaza


General

Aluminum profile with the option to install the LED for direct or indirect lighting, in a satin white finish for creating perimeter coves in drywall or other materials that meet the required thickness.

Note: can be installed on 12,5 mm thick plasterboard surfaces or other materials that meet the same dimensions.

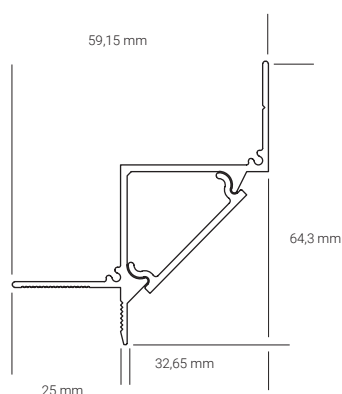

Direct lighting

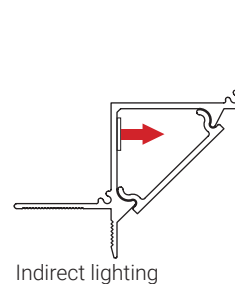

Indirect lighting

Technical data profile / diffuser

Dimensions

• 1000 mm / 0,55 kg

Continuos roll

• 50 m / 4 kg

Packaging dimensions

• 3010 x 65 x 60 mm

• 800 x 800 x 60 mm


Materials

Profile in 6063 aluminum.

Finishes

Satin white

*For different color finishes, consult.

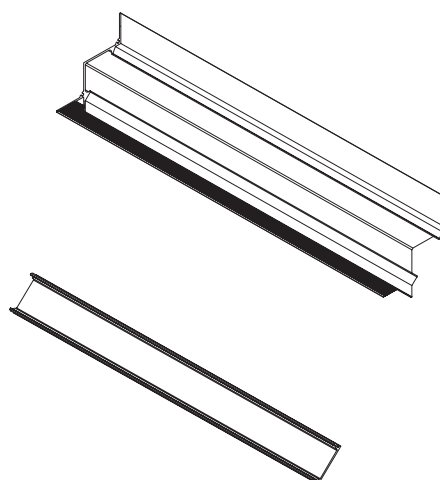

Accessories**Covers**

Gleco profile cover

T-PG

