




Designed by
Enrique Ferrer Plaza

General

Indirect lighting aluminum profile with a textured white finish for recessed ceilings. The profile comes equipped with an LED holder to which a flexible LED strip or rigid LED panel can be added. Its curved shape optimizes lighting output by evenly distributing indirect light throughout the room.

Note: only installable on 12,5 mm thick plasterboard surfaces.

Note: for cutting the profile, a minimum 305 mm disc is required.

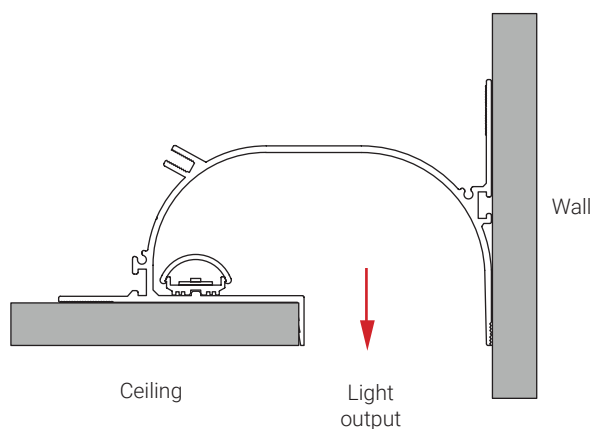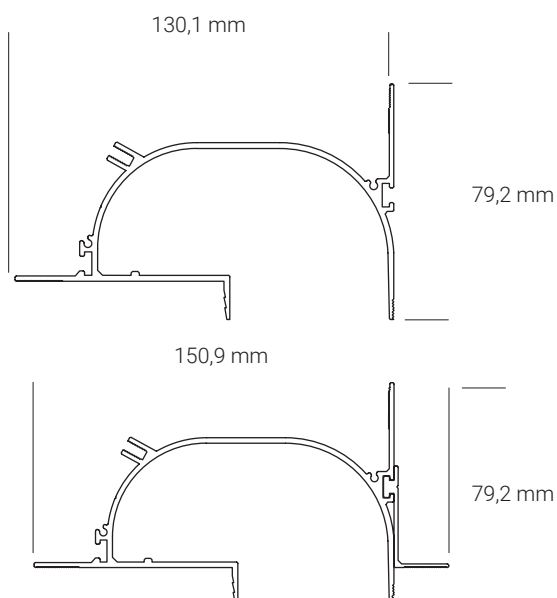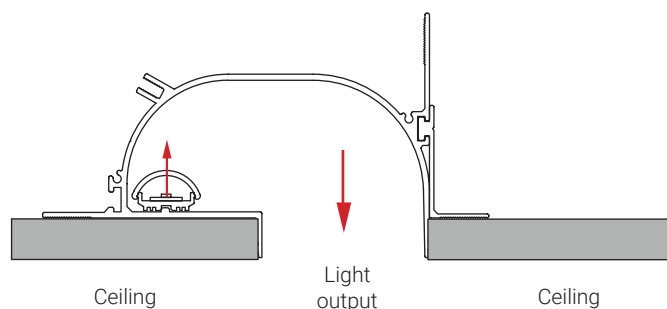

Technical data

Dimensions

- 3000 mm / 5,19 kg (A)
- 3000 mm / 6 kg (B)

Packaging dimensions

- 3010 x 140 x 90 mm
- 3010 x 160 x 90 mm



Materials

- Profile in 6063 aluminum

Finishes


- Textured white

*For different color finishes, consult.

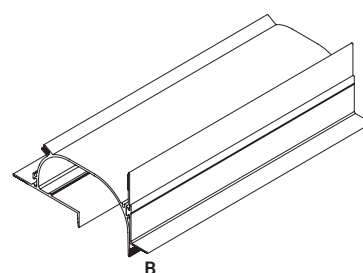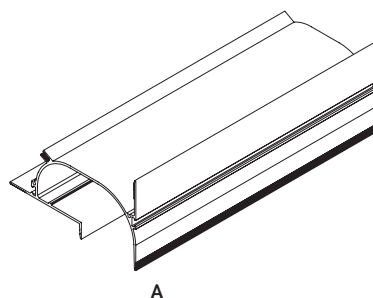


Accessories

Elbows

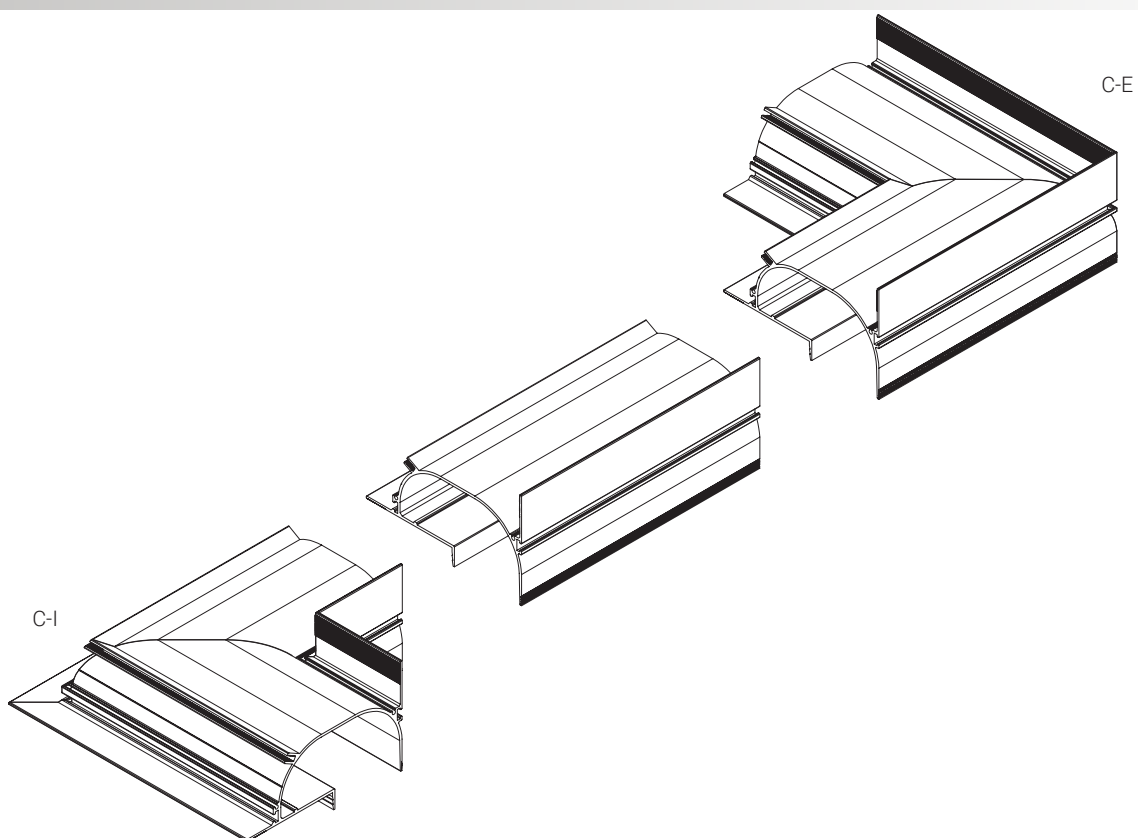


Pre-assembled elbow

Inner elbow C-I

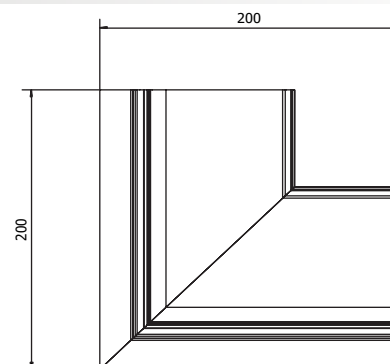


External Elbow C-E

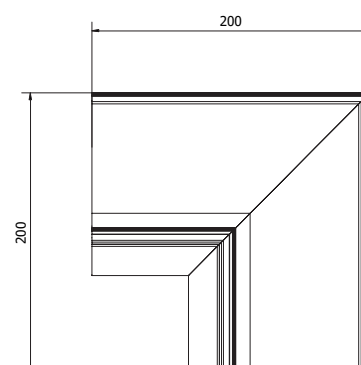



Accessories

Plasterboard support

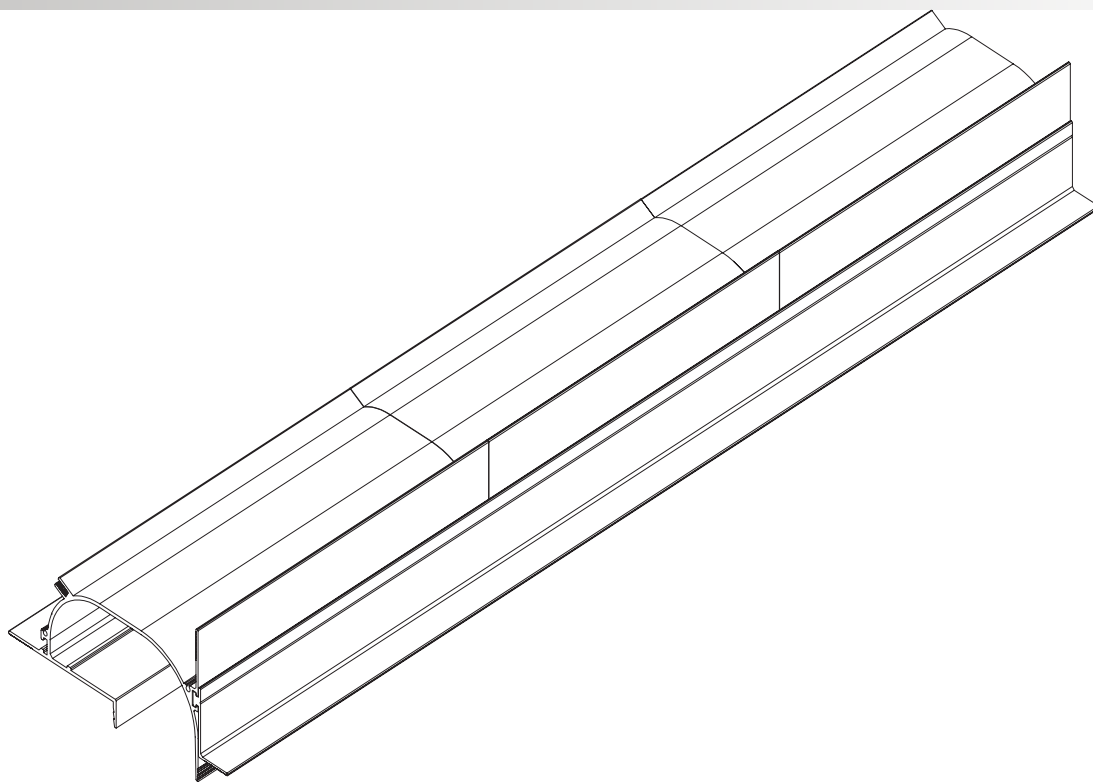


Plasterboard supports (includes fixing screws)

Lineal support x1
S-L

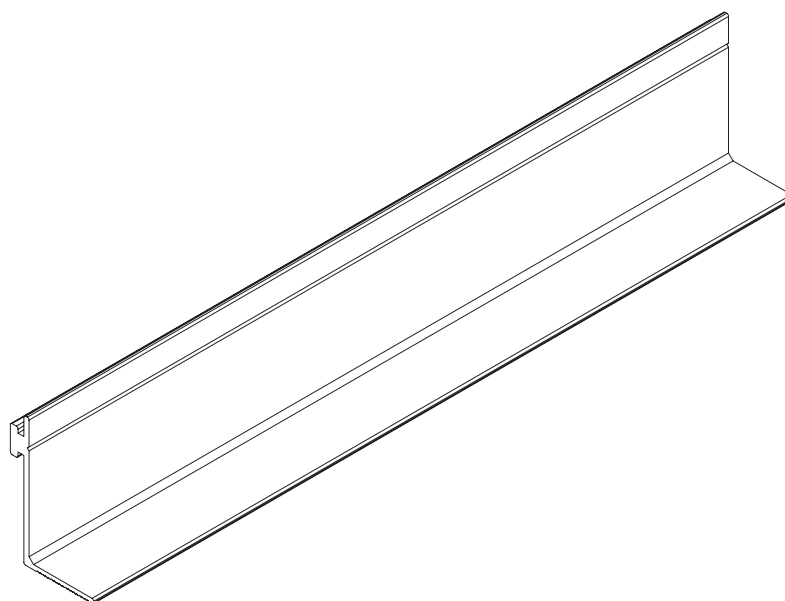

Accessories


Plasterboard support

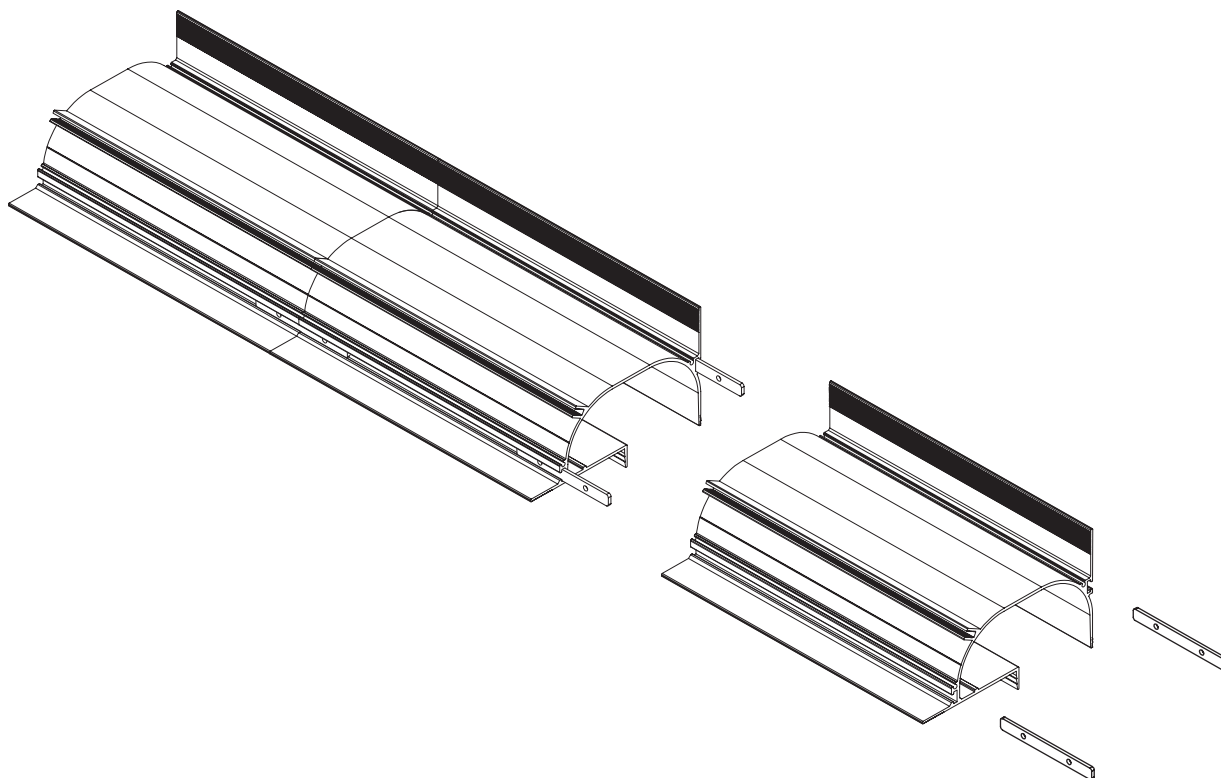

Linear covers and joints (includes fixing screws)


Covers
T-G

x2
x4 / Screw 2,9 x 13 mm






Linear joints U-L

x2
x4 / Threaded rod M4 x 5 mm



Accessories

Plasterboard support

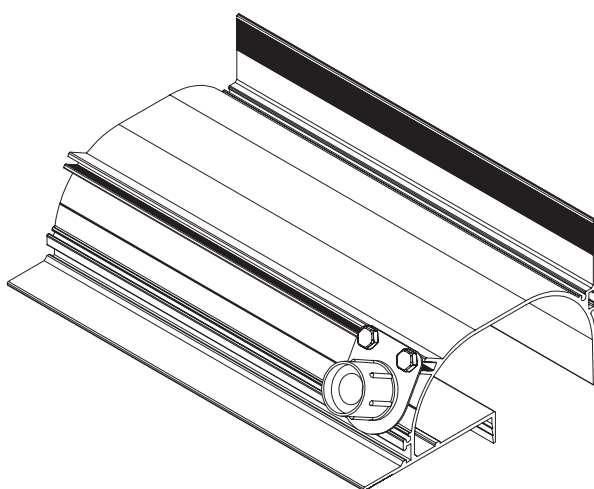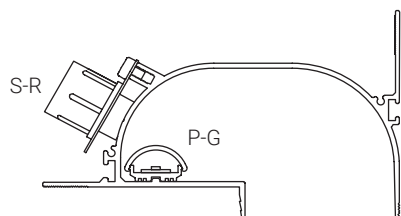

NOTE: Leave a minimum of 18 mm from the profile cut to the cable entry hole.


Recommended drill diameter
10 mm.

Plasterboard supports (includes fixing screws)

Racor support x1

S-R

x2 / Hex head screw M4 x 6 mm



Glint plate x1

P-G

